

## CWM 2000 M-F

CONVECTORS

PRODUCT-NO.: 204455

### The main features

Freestanding convectors with a high heating output

---

Mechanical temperature controller

---

For maximum operational reliability, the integral pendulum switch protects against overturning

---

Handle and feet with castors

---

All-pole operating switch

---

Long lasting stainless steel tubular heater with steel fins





Type	CWM 750 M-F	CWM 1000 M-F	CWM 1500 M-F
Part no.	204452	204453	204454

## Wärmeleistung

Rated heating output P <sub>nom</sub>	0.75 kW	1.00 kW	1.50 kW
Minimum heating output (standard value) P <sub>min</sub>	0.00 kW	0.00 kW	0.00 kW
Maximum continuous heating output P <sub>max,c</sub>	0.75 kW	1.00 kW	1.50 kW

## Hilfsstromverbrauch

Auxiliary power consumption with rated heating output e <sub>lmax</sub>	0.00 kW	0.00 kW	0.00 kW
Auxiliary power consumption with minimum heating output e <sub>lmin</sub>	0.00 kW	0.00 kW	0.00 kW
Auxiliary power consumption in standby mode e <sub>lSB</sub>	0.00 kW	0.00 kW	0.00 kW


## Art der Wärmeleistung/Raumtemperaturkontrolle

Type of heating output/room temperature control: Single stage heating output, no room temperature control	-	-	-
Type of heating output/room temperature control: Two or more manually adjustable stages, no room temperature control	-	-	-
Type of heating output/room temperature control: With mechanic thermostat room temperature control	x	x	x
Type of heating output/room temperature control: With electronic room temperature control	-	-	-
Type of heating output/room temperature control: Electronic room temperature control plus day timer	-	-	-
Type of heating output/room temperature control: Electronic room temperature control plus week timer	-	-	-

## Sonstige Regelungsoptionen

Other control options: Room temperature control, with presence detection	-	-	-
Other control options: Room temperature control, with open window detection	-	-	-
Other control options: With remote control option	-	-	-
Other control options: With adaptive control of heating startup	-	-	-
Other control options: With operating time limitation	-	-	-
Other control options: With black bulb sensor	-	-	-



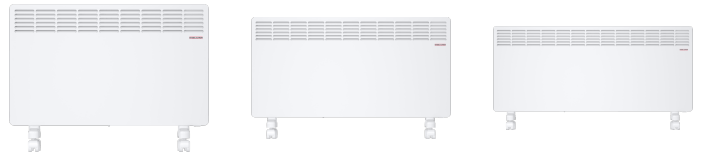

Type	CWM 2000 M-F	CWM 2500 M-F	CWM 3000 M-F
Part no.	204455	204456	204457

## Wärmeleistung

Rated heating output P <sub>nom</sub>	2.00 kW	2.50 kW	3.00 kW
Minimum heating output (standard value) P <sub>min</sub>	0.00 kW	0.00 kW	0.00 kW
Maximum continuous heating output P <sub>max,c</sub>	2.00 kW	2.50 kW	3.00 kW

## Hilfsstromverbrauch

Auxiliary power consumption with rated heating output e <sub>lmax</sub>	0.00 kW	0.00 kW	0.00 kW
Auxiliary power consumption with minimum heating output e <sub>lmin</sub>	0.00 kW	0.00 kW	0.00 kW
Auxiliary power consumption in standby mode e <sub>lSB</sub>	0.00 kW	0.00 kW	0.00 kW

## Art der Wärmeleistung/Raumtemperaturkontrolle

Type of heating output/room temperature control: Single stage heating output, no room temperature control	-	-	-
Type of heating output/room temperature control: Two or more manually adjustable stages, no room temperature control	-	-	-
Type of heating output/room temperature control: With mechanic thermostat room temperature control	x	x	x
Type of heating output/room temperature control: With electronic room temperature control	-	-	-
Type of heating output/room temperature control: Electronic room temperature control plus day timer	-	-	-
Type of heating output/room temperature control: Electronic room temperature control plus week timer	-	-	-

## Sonstige Regelungsoptionen

Other control options: Room temperature control, with presence detection	-	-	-
Other control options: Room temperature control, with open window detection	-	-	-
Other control options: With remote control option	-	-	-
Other control options: With adaptive control of heating startup	-	-	-
Other control options: With operating time limitation	-	-	-
Other control options: With black bulb sensor	-	-	-

This product is only suitable for well insulated rooms or for occasional use. Depth and height including feet with castors

---

## **Contact information**

You have questions? We appreciate to help you:

Call **+49 5531 - 7020**

Write an email to **[info@stiebel-eltron.com](mailto:info@stiebel-eltron.com)**

## **Installation information**

Please ask your local power supply utility or a registered electrician to install appliances that are not fully wired, i.e. ready to plug in. The electrician should also be able to assist you with obtaining the agreement of the respective power supply utility required for the appliance installation.